

Count™
MADE IN USA

FC114
FC114A (shown)



The only all-in-one numbering, pering and creasing solution




Choose air or friction paper feed

Automatic sheet set-up with a single touch

Includes 2 pneumatic numbering heads

User-friendly touch screen control

Auto setups of all the following:

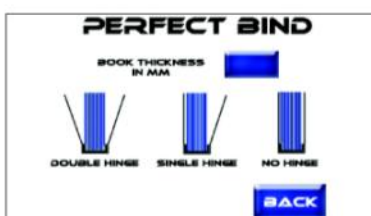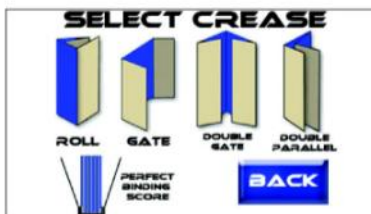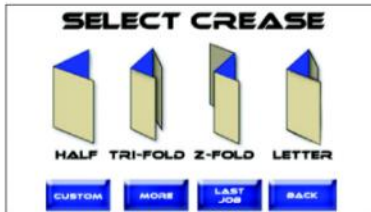

One easy-to-use machine to meet all your creasing, perforating and numbering needs.



Rotary Perforating Standard



RAC Compression Crease



Numbering Head Wheel With Font Style Gothic (7)

With the investment in a single machine, you can handle high quality perforating, creasing and numbering all-in-one. The COUNT FC114 is available with reliable friction paper feed, or choose the FC114A bottom air-feed machine. Both deliver accurate rotary-actuated creasing with 2 crease widths, pneumatic numbering up to 24 times per sheet virtually anywhere on the sheet, plus perforation and optional micro-perfing. It's a compact, incredibly easy to use and highly versatile "all in one" solution that includes automatic "one-touch" set-ups.

FC114, FC114A

The only all-in-one solution for quality creasing, perforating and numbering is compact, versatile and easy to use.



Features

- Choose the reliable top friction feed option (FC114) or the bottom air feed (FC114A) with register guide.
- Simple programming allows you to number, perforate or crease individually.
- Creasing features include:
 - Rotary-actuated impact creasing – ensures maximum accuracy.
 - Two-sided creasing die – accommodates shallow or deep crease for different stock – simply remove and flip over to change, standard and extra wide creasing dies included.
 - Automated Distance Recognition – allows auto setups for your most common creases and corresponding folds.
- Numbering features:
 - Includes reliable pneumatic, Gothic wheel reverse numbering heads – with 7 digits, 3 drop zeros and 4 repeats.
 - Program each numbering head individually for multiple numbering.
 - Flexibility to apply numbers virtually anywhere on a sheet – from lead edge, place numbers within 1 mm of previous number.
 - Number single sheets, or crash number up to a 10-part carbonless form.
 - Choice of black or red ink, in patented self-inking disposable cartridges – no re-inking required! – for approx. 25,000 impressions per cartridge.
- Complete perforating assembly included, with linear perf/score capabilities up to 4 perfs per sheet, including micro perf.
- FC114 includes micro-lateral adjustable feed rails and sheet counter (batch and total counting).
- Accommodates inline folder (see COUNT KF-200); add inline transport to feed into CountCoat UV coater.
- User-friendly touch screen for easy set up and control of the machine.

Specifications

Model No.:	FC114 (friction feed) FC114A (air feed)
Weight:	FC114: 150 lbs (68 kg) FC114A: 220 lbs (100 kg)
Max Compression Crease: (sheets per hour)	4,500
Max Numbering Speed: (sheets per hour)	8,000
Max Rotary Perf/Score Speed: (sheets per hour)	12,000
Paper Weight Range: (gsm)	60 - 350
Dimensions:	FC114: 44.0 L x 44.0 W x 32.0 H in (111.8 x 111.8 x 81.3 cm) FC114A: 63.0 L x 29.0 W x 43.0 H in (160.0 x 73.7 x 109.2 cm)
Max Sheet Size:	18 x 24 in (45.7 x 50.8 cm)
Min Sheet Size:	FC114: 4.5 x 6 in (7.6 x 12.7 cm) FC114A: 4.5 x 6 in (12.7 x 15.0 cm)
Electrical:	110/220 V, 50/60 Hz
Made in:	U.S.A.

